







Linearis Compact			Products
Illustration and dimensioned drawing	Article description	Channel length	Article #
<p>Installation depth only 80 mm</p>  <p>Channel length from 300 to 650 mm</p>	<p>Shower channel <i>Linearis Compact</i> With drain body in ABS, Ø 50, lateral outlet With removable odour trap, sealing water height 22 mm <input type="checkbox"/> cover and rim in stainless steel AISI 304 (Channel cover can be reversed and tiled on site), class K 3, seeping water openings prepared</p>	300 mm	45 600.59
		450 mm	45 600.60
 <p>Channel length from 750 to 1150 mm</p>		550 mm	45 600.61
		650 mm	45 600.62
	<p>Installation supports and mesh fabric included</p>	750 mm	45 600.63
		850 mm	45 600.64
	<p>0.5 l/sec flow rate without threshold, 0.6 l/sec flow rate with 10 mm threshold</p>	950 mm	45 600.65
		1050 mm	45 600.66
		1150 mm	45 600.67

Linearis Compact			Accessories
Illustration and dimensioned drawing	Article description	Channel length	Article #
 <p>Example: Installation aid can be shortened on-site Suitable for all channel lengths from 300 to 1150 mm</p> 	<p>Installation aid Replaces the screed underlining Including mounting adhesive</p> <p><input type="checkbox"/> Linearis Compact Suitable for all lengths, can be shortened on-site</p>	-	48 639
	<p>Collar seal As a seal below the ceramic surfaces made of modified polyethylene membrane with fleece on both sides with printed cutting template suitable for all channel lengths Including mounting adhesive</p>	-	48 638

Installation example *Linearis Compact*



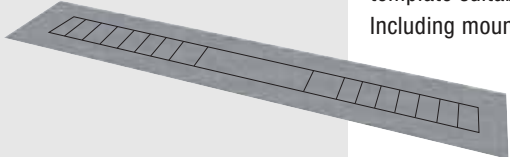


Shower channels in a classic, timeless design. Minimalistic impression fits elegantly in a purist bathroom design. The finely finished channel surface in stainless steel ① can be reversed to offer a recessed side where the bathroom tile or natural stone surface can be installed. The channels are ready-to-install with their welded on drain body ②, including an odour trap and Ø 50 outlet. *Linearis Compact* can be installed on the room or wall side of the shower. The flexible installation supports ③ can be shortened for wall-side installation.

Professional advantages

- **Stainless steel cover is reversible and tileable**
- **Installation in the room or on the wall**
The length of the feet can be shortened on the left or right if mounted to the wall.
- **Hygienic design** - single piece body and channel cover
- **Channel length:** 300 mm, 450 mm, 550 mm, 650 mm, 750 mm, 850 mm, 950 mm, 1050 mm, 1150 mm.
- **Flow rate** with counter slope **up to 0.6 l/sec with 10 mm threshold. Flow rate increased to 0.9 l/sec** with use of **Multistop** odour trap.
- **Cover and rim** made of stainless steel.
- **Multistop (optional)** - odour, foam, rodent and insect stop
- **Hair filter (optional)**



SmartSelect makes planning quite simply quicker - visit smartselect.kessel.de for the configurator for alternative waterproofing layers in the system

<i>Linearis Compact</i>			Accessories
Illustration and dimensioned drawing	Article description	Channel length	Article #
 Illustration shows ①	Odour trap ① sealing water height 22 mm ② sealing water height 50 mm only for shower channel <i>Linearis Compact</i> and <i>Linearis Comfort</i>	-	48 603
		-	48 602
	Multistop odour, foam, rodent and insect stop	-	48 400
	Hair filter	-	48 800