

Shower channel upper section *Linearis*




Linearis in ABS
with tileable access cover

□ cover and rim in stainless steel AISI 304, class K 3, with seeping water opening, installation supports and mesh fabric

0.4 l/sec flow rate with 10 mm threshold


Length	Art. #
750 mm	27 808
850 mm	27 809
950 mm	27 810
1150 mm	27 812

Accessories




Glue flange

with counter flange
(also for compound seal)
Art. # **43 401**




Extension section

in PP, with pressure sealing flange in stainless steel AISI 304, flange width 63 mm
Art. # **27 198**

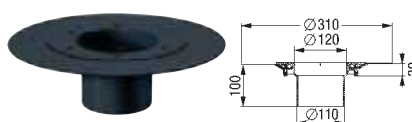

Extension section

in ABS, with glue flange and counter flange
Art. # **27 199**



With glue flange and waterproof membrane


pre-mounted in PVC
1200 x 1200 mm Art. # **43 401.91**
1800 x 2000 mm Art. # **43 401.93**

Waterproof membrane in PVC without punched-out hole
1800 x 2000 mm Art. # **43 711**


Glue
Art. # **43 719**

Elastomer waterproof membrane □ 500 mm

in PVC Art. # **43 710**
in EPDM Art. # **43 730**



The waterproof membrane in PVC and EPDM are not suitable for connections to asphalt sheeting.



Extension section

in ABS, with lip seal
Art. # **27 146**



Multistop

odour, foam, rodent and insect stop
Art. # **43 500**



Hair filter

made of polymer, Ø 108 mm
Art. # **43 700**




Transition section

with sealing ring Ø 50
Ø 50/75 Art. # **27 126**
Ø 50/40 Art. # **27 118**

Drain bodies

*) according to EN 1253 - 20 mm threshold




0.8 l/sec flow rate *)
Sealing water height 50 mm

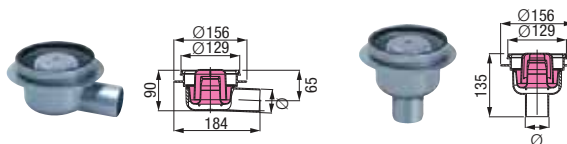

Bathroom drain *Classic* in ABS

with removable odour trap		
Ø	Lateral outlet	Vertical outlet
50	Art. # 40 150	Art. # 40 250
75	Art. # 40 170	Art. # 40 270

without removable odour trap		
Ø	Lateral outlet	Vertical outlet
50	Art. # 40 151	Art. # 40 251
75	Art. # 40 171	Art. # 40 271



Bathroom drain "The Superflat" in PP

Lateral outlet Ø 50, with removable odour trap

Without lateral inlet
Art. # **42 700**

One lateral inlet Ø 40
Art. # **42 701**

Three lateral inlets Ø 40
Art. # **42 703**

0.8 l/sec flow rate *)
Sealing water height 30 mm