


**Linearis Super60 "Wengé"** in ABS  
with tileable access cover

Cover in wood look, handles loads up to 100 kg, with seeping water opening, installation supports and mesh fabric

Length	Art. #
750 mm	<b>48 908 IW</b>
850 mm	<b>48 909 IW</b>
950 mm	<b>48 910 IW</b>
1150 mm	<b>48 912 IW</b>

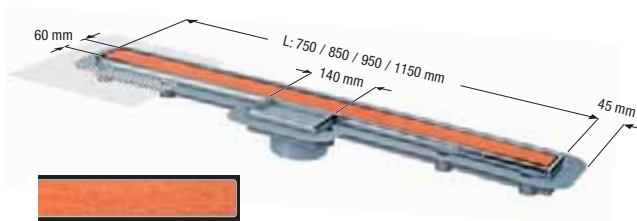

**Linearis Super60 "Burlwood"** in ABS  
with tileable access cover

Cover in wood look, handles loads up to 100 kg, with seeping water opening, installation supports and mesh fabric

750 mm	<b>48 908 IH</b>
850 mm	<b>48 909 IH</b>
950 mm	<b>48 910 IH</b>
1150 mm	<b>48 912 IH</b>

Minimum installation depth of upper section (without drain body) 46 mm

**Linearis** in ABS  
with tileable access cover

cover and rim in stainless steel AISI 304, class K 3, with seeping water opening, installation supports and mesh fabric  
0.4 l/sec flow rate with 10 mm threshold

Length	Art. #
750 mm	<b>46 908</b>
850 mm	<b>46 909</b>
950 mm	<b>46 910</b>
1150 mm	<b>46 912</b>




**Multistop**

odour, foam, rodent and insect stop  
Art. # **48 500**



**Hair filter**

made of polymer  
Art. # **48 700**



**Fire-Kit Fire protection insert**

Only for *Ecoguss* / *Practicus* drains with vertical outlet and odour trap

Ø 58/78/83 Art. # **48 099**  
Ø 50/75 Art. # **48 099**  
Ø 110 Art. # **48 100**

Certification no. Z-19.17-1719



**Quick-Fit the passage seal**

for core drillings for drain bodies *Ecoguss* and *Practicus*, with vertical outlet

without fire protection Art. # **48 991**

\*with fire protection Art. # **48 990**

(only in combination with *Fire-Kit* protection insert)

\* Certification no. Z-19.17-1719

All drain bodies:  
1.8 l/sec flow rate  
Sealing water height 50 mm





**Ecoguss**

with removable odour trap



**Practicus in PP**

with removable odour trap



Lateral outlet				Vertical outlet	
Ø	B	H	Article #	H	Article #
<b>58</b>	245	120	<b>48 358</b>	100	<b>48 458</b>
<b>78</b>	134	109	<b>48 378</b>	110	<b>48 478</b>
<b>83</b>	134	108	<b>48 383</b>	110	<b>48 483</b>
<b>110</b>	148	92	<b>48 311</b>	110	<b>48 411</b>

Lateral outlet			Vertical outlet		
Ø	B	H	Article #	H	Article #
<b>50</b>	245	120	<b>45 150</b>	100	<b>45 250</b>
<b>75</b>	134	109	<b>45 170</b>	110	<b>45 270</b>
<b>110</b>	148	92	<b>45 110</b>	110	<b>45 210</b>