


# Shower channel *Linearis Super60* and *Linearis* System 125

## Shower channel upper section *Linearis Super60*


1.1 l/sec flow rate  
1.2 l/sec with 10 mm threshold

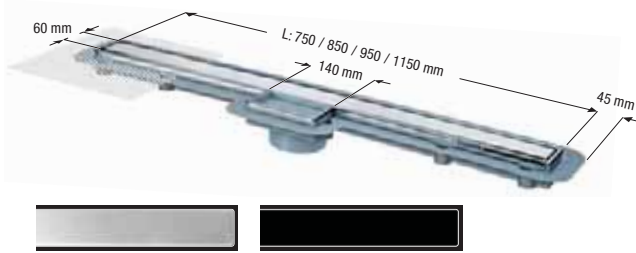

**Linearis Super60** in ABS  
with tileable access cover

cover and rim in stainless steel AISI 304 (Channel cover can be reversed and tiled on site), class K 3, with seeping water opening, installation supports and mesh fabric

Length	Art. #
750 mm	<b>48 908</b>
850 mm	<b>48 909</b>
950 mm	<b>48 910</b>
1150 mm	<b>48 912</b>

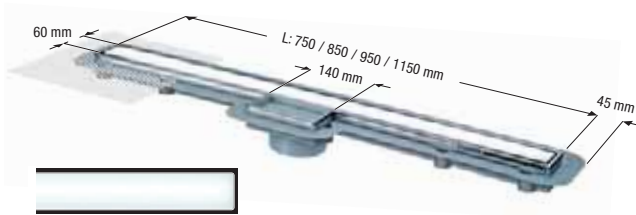


**Linearis Super60 Light** in ABS  
with tileable access cover

cover with maintenance-free induction technology and "white" LED lights (other colours available upon request), 15 m power cable, handles loads up to 100 kg, with seeping water opening, installation supports and mesh fabric





750 mm	<b>48 908 IC</b>
850 mm	<b>48 909 IC</b>
950 mm	<b>48 910 IC</b>
1150 mm	<b>48 912 IC</b>

Minimum installation depth of upper section (without drain body) 46 mm

## Shower channel upper section *Linearis*

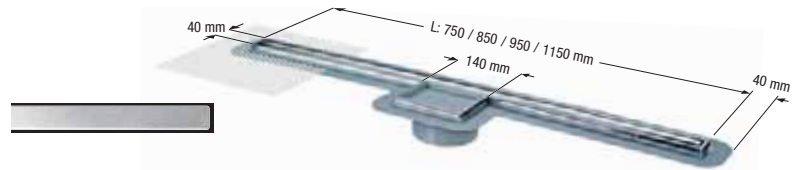

## Accessories



### Glue flange

with counter flange,  $\varnothing$  348 mm (also for compound seal)  
Art. # **48 410**

### Pressure sealing flange

in stainless steel AISI 304,  $\varnothing$  273 mm, with seeping water opening  
Art. # **48 402**

### Extension section






in PP, with lip seal  
without lateral inlet  $\varnothing$  50 Art. # **48 987**  
with lateral inlet  $\varnothing$  50 Art. # **48 989**

## Drain bodies

1.0 l/sec flow rate  
Sealing water height 30 mm

1.0 l/sec flow rate  
Sealing water height 30 mm

1.2 l/sec flow rate  
Sealing water height 50 mm



### "The Ultraflat" in ABS

with removable odour trap  
Lateral outlet  $\varnothing$  50  
Art. # **45 700**


Lateral outlet  $\varnothing$  75  
Art. # **45 770**

### "The Ultraflat" in ABS

with removable odour trap  
with lateral inlet  $\varnothing$  40,  
lateral outlet  $\varnothing$  50  
Art. # **45 701**


### "The Vertical" in ABS

Vertical outlet  $\varnothing$  50/40  
with removable odour trap  
fits all upper sections System 125  
Art. # **45 254**

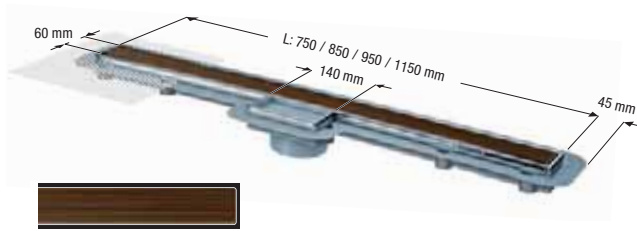

**Linearis Super60 "Wengé" in ABS with tileable access cover**  
 **Cover in wood look**, handles loads up to 100 kg, with seeping water opening, installation supports and mesh fabric

Length	Art. #
750 mm	<b>48 908 IW</b>
850 mm	<b>48 909 IW</b>
950 mm	<b>48 910 IW</b>
1150 mm	<b>48 912 IW</b>

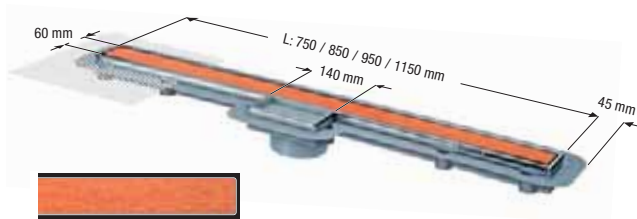

**Linearis Super60 "Burlwood" in ABS with tileable access cover**  
 **Cover in wood look**, handles loads up to 100 kg, with seeping water opening, installation supports and mesh fabric

750 mm	<b>48 908 IH</b>
850 mm	<b>48 909 IH</b>
950 mm	<b>48 910 IH</b>
1150 mm	<b>48 912 IH</b>

Minimum installation depth of upper section (without drain body) 46 mm

**Linearis in ABS with tileable access cover**  
 **cover and rim in stainless steel AISI 304**, class K 3, with seeping water opening, installation supports and mesh fabric  
 0.4 l/sec flow rate with 10 mm threshold

Length	Art. #
750 mm	<b>46 908</b>
850 mm	<b>46 909</b>
950 mm	<b>46 910</b>
1150 mm	<b>46 912</b>



### Multistop

odour, foam, rodent and insect stop  
 Art. # **48 500**



### Hair filter

made of polymer  
 Art. # **48 700**



### Fire-Kit Fire protection insert



Only for *Ecoguss* / *Practicus* drains with vertical outlet and odour trap  
 Certification no. Z-19.17-1719  
 Ø 58/78/83 Art. # **48 099**  
 Ø 50/75 Art. # **48 099**  
 Ø 110 Art. # **48 100**



### Quick-Fit the passage seal

for core drillings for drain bodies *Ecoguss* and *Practicus*, with vertical outlet  
 Certification no. Z-19.17-1719  
**without fire protection** Art. # **48 991**  
**\*with fire protection** Art. # **48 990**  
 (only in combination with *Fire-Kit* protection insert)

All drain bodies:  
 1.8 l/sec flow rate  
 Sealing water height 50 mm



### Ecoguss

with removable odour trap

Lateral outlet				Vertical outlet	
Ø	B	H	Article #	H	Article #
<b>58</b>	245	120	<b>48 358</b>	100	<b>48 458</b>
<b>78</b>	134	109	<b>48 378</b>	110	<b>48 478</b>
<b>83</b>	134	108	<b>48 383</b>	110	<b>48 483</b>
<b>110</b>	148	92	<b>48 311</b>	110	<b>48 411</b>

### Practicus in PP

with removable odour trap

Lateral outlet				Vertical outlet	
Ø	B	H	Article #	H	Article #
<b>50</b>	245	120	<b>45 150</b>	100	<b>45 250</b>
<b>75</b>	134	109	<b>45 170</b>	110	<b>45 270</b>
<b>110</b>	148	92	<b>45 110</b>	110	<b>45 210</b>