


Upper section for PVC floorings


Variofix shallow bed upper sections

NEW




in stainless steel AISI 304

with cover \varnothing 133 mm
in stainless steel AISI 304,
 class L 15, screwed.
 For use with 1-4 mm PVC / vinyl flooring.
 Art. # **48 192-V2A**

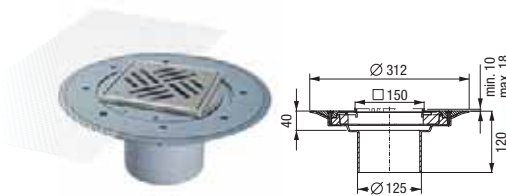


in ABS, incl. mesh fabric

with slotted cover/rim \square 138 mm
in stainless steel AISI 304, class L 15,
 screwed.
 For tile thickness of 8-16 mm.
 Art. # **48 963**

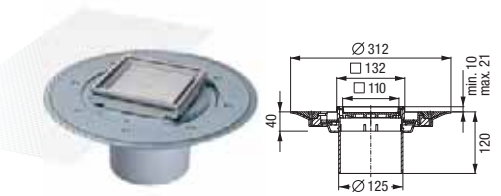


with recessed polymer cover
 for on-site tiling \square 110 mm
 and rim in stainless steel AISI 304,
 class K 3, with locking system
 Art. # **48 906**

Upper sections



in ABS...

with slotted cover/rim
 \square 138 mm
in stainless steel AISI 304
 screwed, class L 15
 Art. # **48 951**



in ABS...

with slotted cover
 \square 120 mm
in stainless steel AISI 304
 screwed, class K 3
 Art. # **48 165**



in ABS...

with slotted cover \square 138 mm, class K 3,
in stainless steel AISI 304, screwed
 Art. # **48 950**

in ABS, black
 Art. # **48 193**




in ABS, tileable...

\square 110 mm, made of polymer, class K 3
 with rim
in stainless steel AISI 304
 Art. # **48 211**


with rim
in polymer
 Art. # **48 210**

Accessories




Glue flange with counter flange

in ABS, \varnothing 348 mm
 (also for compound seal)
 Art.Nr. **48 410**
 can be combined with drain bodies
 and extension sections




Pressure sealing flange

in stainless steel AISI 304, \varnothing 273 mm,
 with seeping water opening
 Art. # **48 402**
 can be combined with drain bodies
 and extension sections

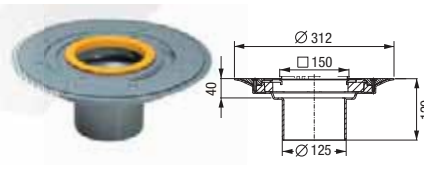

Intermediate section with glue flange

in ABS, for shallow bed gasket
 incl. mesh fabric
 Art. # **48 900**

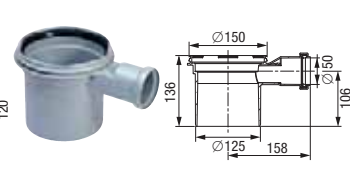

Extension section



in PP, with lip seal
without lateral inlet
 Art. # **48 987**
with lateral inlet \varnothing 50
 Art. # **48 989**

Mesh fabric
 for Art. # 48 410
 Art. # **046-056**

Elastomer waterproof membrane in NBR
 for Art. # 48 402
 Art. # **48 981**

Drain bodies *Ecoguss* and *Practicus*

All drain bodies:
 1.8 l/sec flow rate
 Sealing water height 50 mm



Ecoguss

with removable odour trap

Lateral outlet			
\varnothing	B	H	Article #
58	245	120	48 358
78	134	109	48 378
83	134	108	48 383
110	148	92	48 311
Vertical outlet			
58	100		48 458
78	110		48 478
83	110		48 483
110	110		48 411

Modular system with covers in stainless steel AISI 304

Variofix shallow bed upper sections with design cover



in ABS, incl. mesh fabric

design covers □ 120 mm and rim in stainless steel AISI 304, class K3 / L 15. For tile thickness of 8-21 mm, with or without Lock & Lift System

		Kessel (Cl. L 15)	Oval (Cl. L 15)	Spot (Cl. K 3)	Cross (Cl. K 3)	Festival (Cl. K 3)	Parade (Cl. K 3)	Slot (Cl. K 3)	Sticks (Cl. K 3)
with Lock & Lift...	Art. #	48 904	48 905	48 621	48 613	48 615	48 624	48 619	48 617
without Lock & Lift...	Art. #	48 625	48 626	48 620	48 612	48 614	48 623	48 618	48 616


Upper section with design cover



in ABS

design covers □ 120 mm and rim in stainless steel AISI 304, class K 3 / L 15 with or without Lock & Lift System


		Kessel (Cl. L 15)	Oval (Cl. L 15)	Spot (Cl. K 3)	Cross (Cl. K 3)	Festival (Cl. K 3)	Parade (Cl. K 3)	Slot (Cl. K 3)	Sticks (Cl. K 3)
with Lock & Lift...	Art. #	48 201	48 202	48 221	48 213	48 215	48 224	48 219	48 217
without Lock & Lift...	Art. #	48 225	48 226	48 220	48 212	48 214	48 223	48 218	48 216

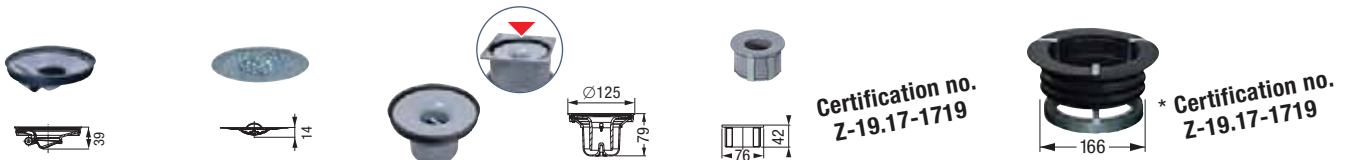

Multistop	Hair filter	Odour trap	Fire-Kit Fire protection insert	Quick-Fit the passage seal
odour, foam, rodent and insect stop Art. # 48 500	made of polymer Art. # 48 700	for all upper sections System 125, sealing water height 50 mm according to norm Art. # 48 600	Only for <i>Ecoguss / Practicus</i> drains with vertical outlet and odour trap Ø 58/78/83 Art. # 48 099 Ø 50/75 Art. # 48 099 Ø 110 Art. # 48 100	for core drillings for drain bodies with vertical outlet *with fire protection Art. # 48 990 (only in combination with <i>Fire-Kit</i> protection insert) without fire protection Art. # 48 991

Sludge trap
Art. # **48 168** see page 147

All drain bodies:
1.8 l/sec flow rate
Sealing water height 50 mm

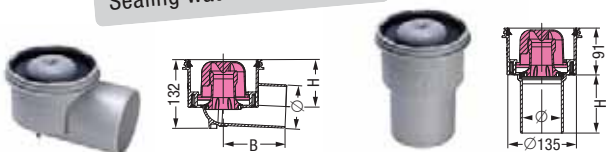

Practicus in PP
with removable odour trap

Lateral outlet			
Ø	B	H	Article #
50	245	120	45 150
75	134	109	45 170
110	148	92	45 110
Vertical outlet			
50	100	45 250	
75	110	45 270	
110	110	45 210	



Insulating body
fits all *Ecoguss / Practicus* drain bodies with vertical outlet
Art. # **48 952**